

# V2B

## Standard Wiring

Vannetti  
Bass Designs

Bass: +/-12dB @ 67Hz

Dual Presence Filter:


Hi-Mid: Wide-band, +/-16dB @ 2.8kHz Cf

Treble: +/-14dB @ 6.3kHz

Volume & Blend values dependent on pickups:


Use 25k for Active (Low Impedance) pickups;

250k for Passive (High Impedance) pickups

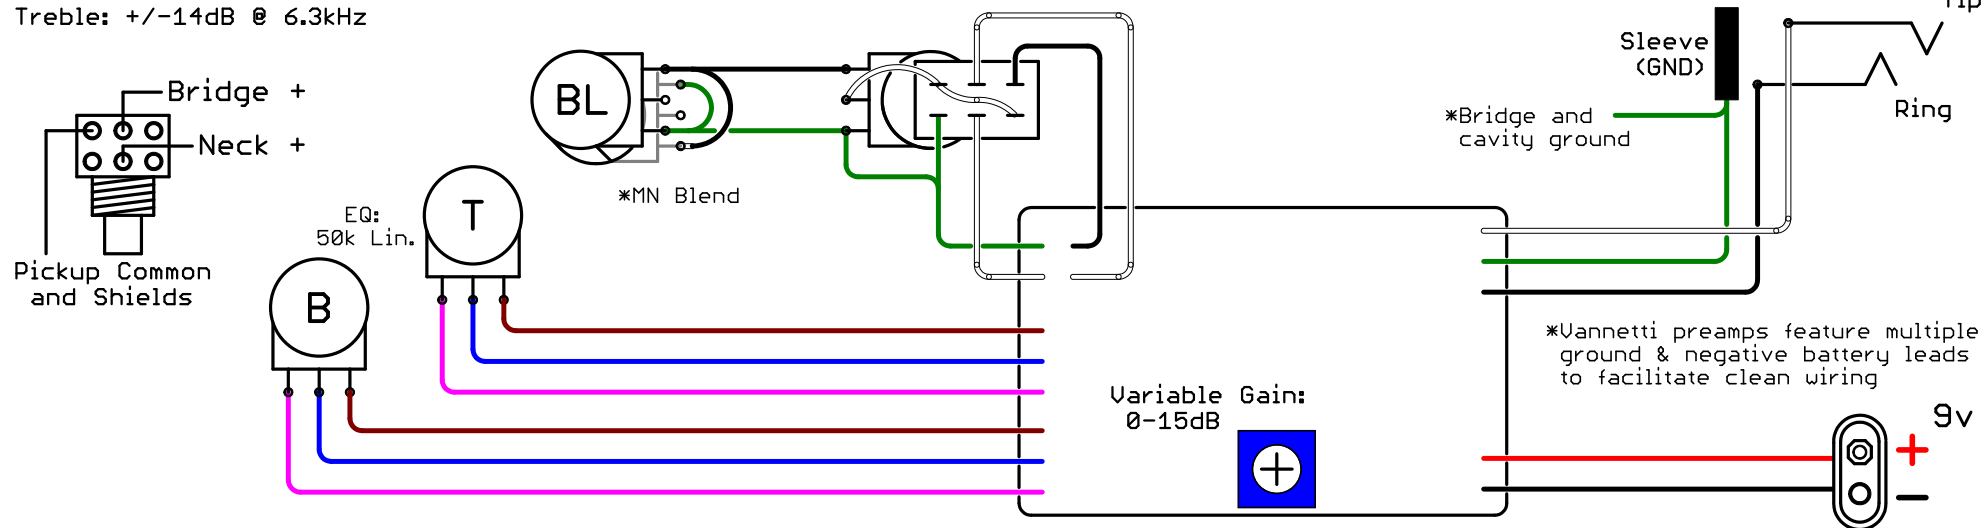


### Filter Switch: Push-Pull

Push: Hi-Mid; Pull: Treble

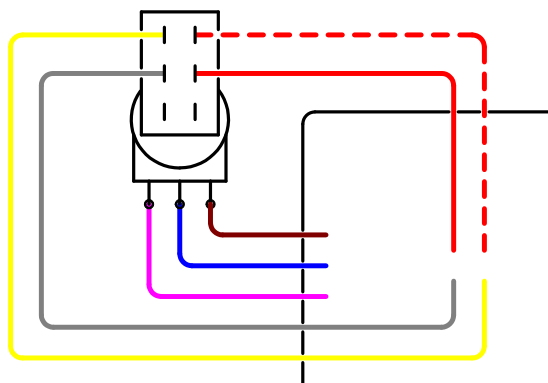


### Filter Switch: Toggle

Treble  
High-Mid

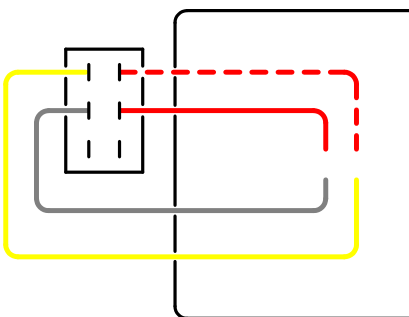

### Active/Passive Toggle

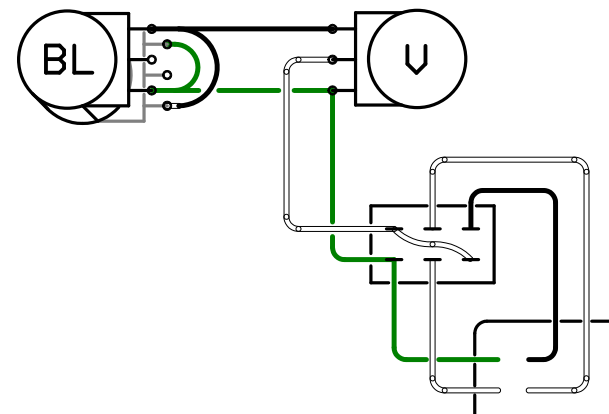

\*Wired as shown, inserting 1/4" mono cable into stereo jack will apply power to V2B. Remove cable when not in use to preserve battery life.

All pots and switches shown bushing down.