

## Wiring Diagrams for Pickup Models:


Apollo Jazz Bass - neck  
 Apollo Jazz Bass - bridge  
 Apollo Jazz Bass - set  
 Apollo Jazz Bass - neck 67mm 5 strg  
 Apollo Jazz Bass - bridge 70mm 5 strg  
 Apollo Jazz Bass - set 67/70 5 strg  
 Apollo Jazz Bass - neck 70mm 5 strg  
 Apollo Jazz Bass - bridge 74mm 5 strg  
 Apollo Jazz Bass - set 70/74 5 strg

5427 hollister avenue, Santa Barbara, CA 93111  
 805.964.9610 • seymourduncan.com


### The basic steps for installation include:

1. Remove the strings from your bass.
2. Remove the control plate and flip it over.
3. De-solder the original pickup's wires from the controls and make sure to remember where they were connected.
4. Remove the pickup from the pickup cavity.
5. If the foam in the cavity of your bass has degraded, then replace it with the foam included with your pickups.
6. Put your SD bass pickup into the pickup cavity.
7. Tin the wires from the SD bass pickup, and then solder them into place.
8. Replace the control plate.
9. Re-string your bass, and adjust the pickup to string distance to about 1/8" for the bridge and 3/16" for the neck.

### Wiring for Apollo Jazz Bass 4 String

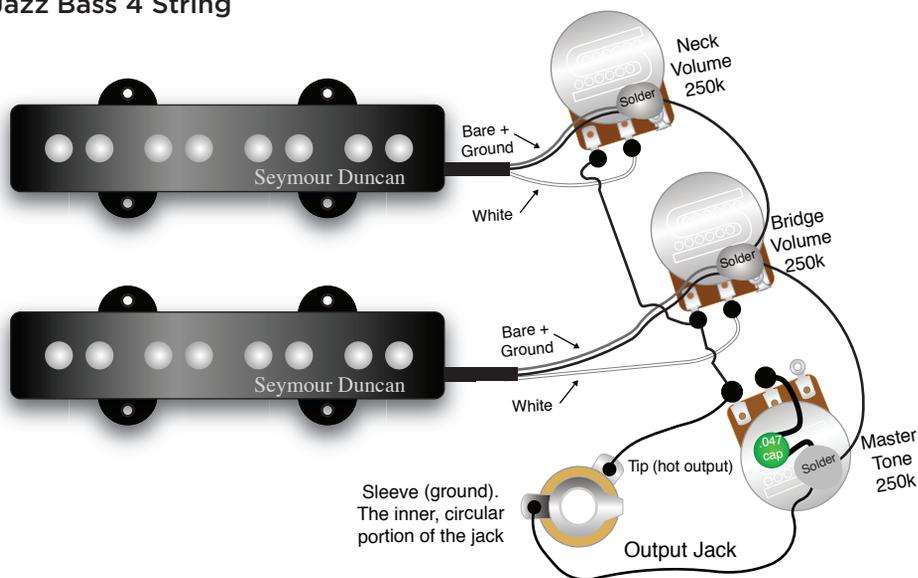

### Wiring for Apollo Jazz Bass 5 String

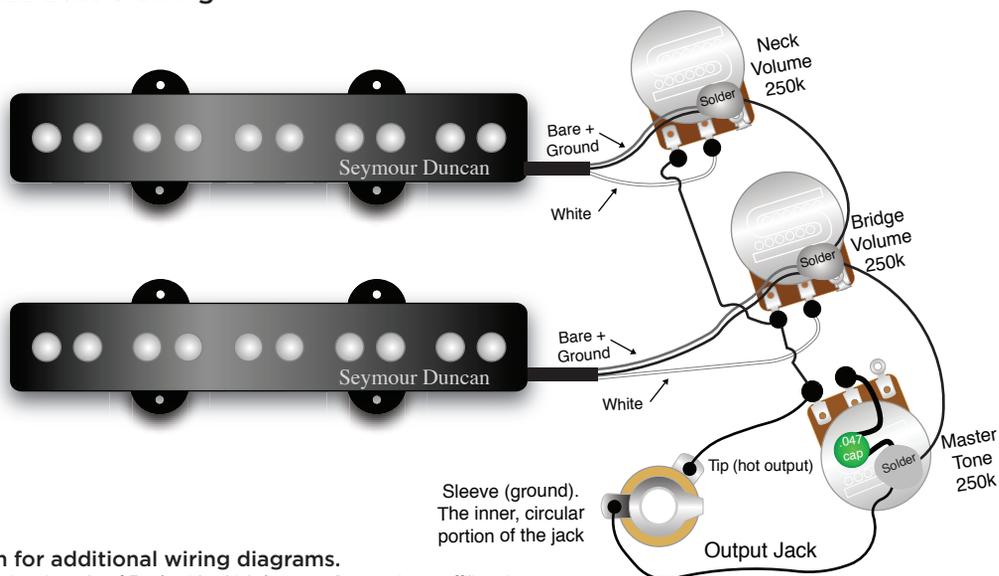

Visit [seymourduncan.com](http://seymourduncan.com) for additional wiring diagrams.

*Jazz Bass and Fender are registered trademarks of FMIC, with which Seymour Duncan is not affiliated*



## Wiring Diagrams for Pickup Models:

*Congratulations on your purchase of a fine, hand-built, Seymour Duncan bass guitar pickup! Installing this pickup in your bass isn't rocket science. And, if you're already handy with tools, it'll be a snap for you, and fun too! But if you have no experience handling red-hot soldering irons, you'd be well advised to take your new pickup and your trusty bass to a qualified guitar tech.*


### The basic steps for installation include:

1. Remove the strings from your bass.
2. Remove the control plate and flip it over.
3. De-solder the original pickup's wires from the controls and make sure to remember where they were connected.
4. Remove the pickup from the pickup cavity.
5. If the foam in the cavity of your bass has degraded, then replace it with the foam included with your pickups.
6. Put your SD bass pickup into the pickup cavity.
7. Tin the wires from the SD bass pickup, and then solder them into place.
8. Replace the control plate.
9. Re-string your bass, and adjust the pickups so they are set about 3/16" from the strings when they are pressed down at the highest fret on the neck.

### Quarter Pound P-Bass® - 5 strg

5427 hollister avenue, Santa Barbara, CA 93111  
805.964.9610 • seymourduncan.com

### Wiring for 5 String Quarter-Pound for P-Bass®

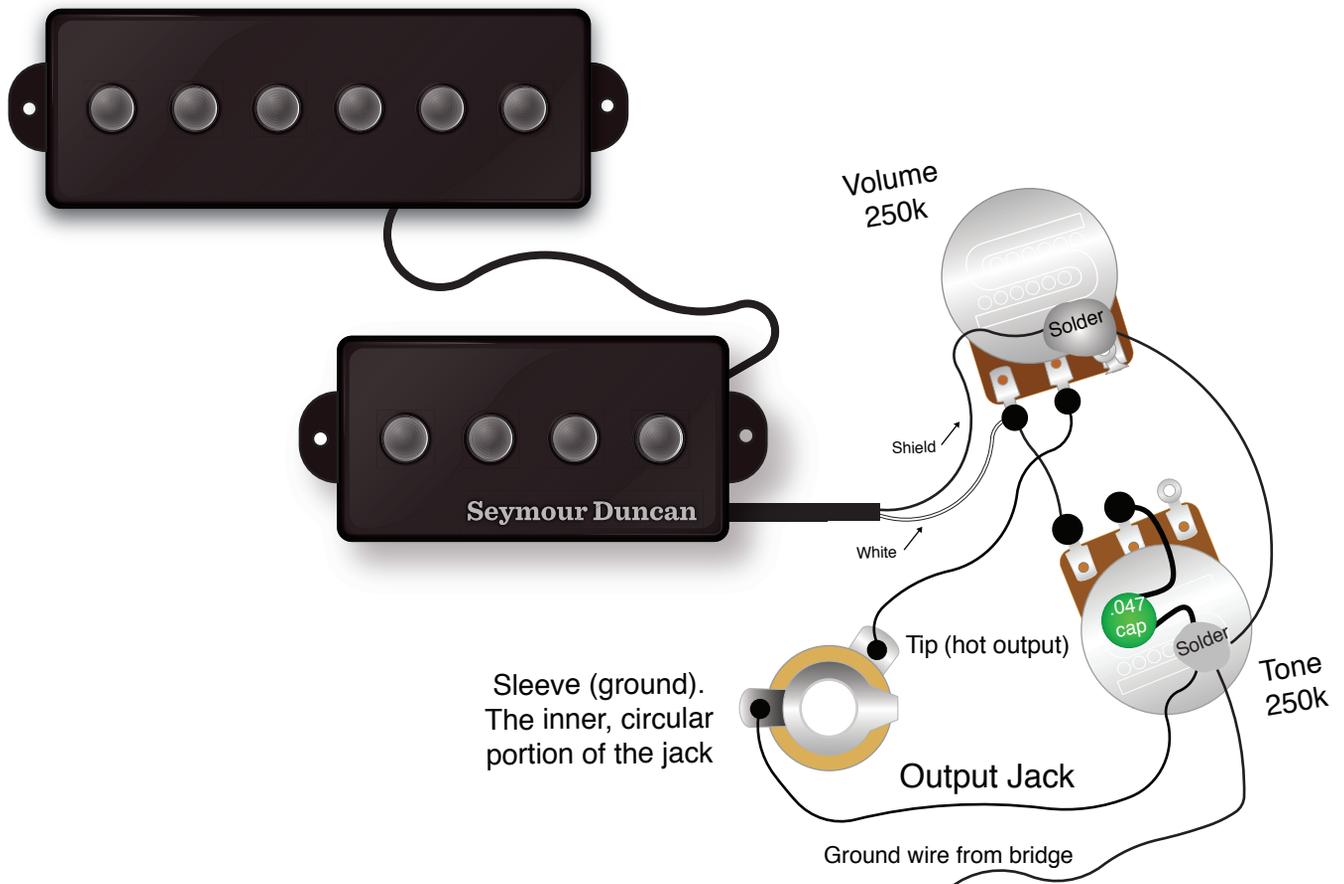

Visit [seymourduncan.com](http://seymourduncan.com) for additional wiring diagrams.

P-Bass and Fender are registered trademarks of FMIC, with which Seymour Duncan is not affiliated