

800TS Jazzplate

The 800TS preamp borrows the EQ section of the famous GK800RB amplifier and squeezes it into an onboard preamp, loaded into a Jazzplate, for you Jazz bass lovers. This tone stack has some serious high frequency power and a very deep bottom end, just like the amplifier its based on.

The Hi-mid and Treble controls are highly interactive; same goes for the Lo-Mid and Bass controls.

This Jazzplate comes with two options; Neck Volume and Bridge Volume or Master Volume and Blend.

Installation and Warranty: This is a solderless preamp. Any tampering with the preamp (ex: soldering or unsoldering directly on the preamp or any of its components) can result in Warranty void.


-Treble: Boost and cut around 4khz

-Bass: Boost and cut at around 60Hz

Voltage: 9 to 27VDC


-Hi- Mid: Boost and cut at around 1khz
-Lo- Mid: Boost and cut at around 250Hz

Current Draw: 2mAh (9v)

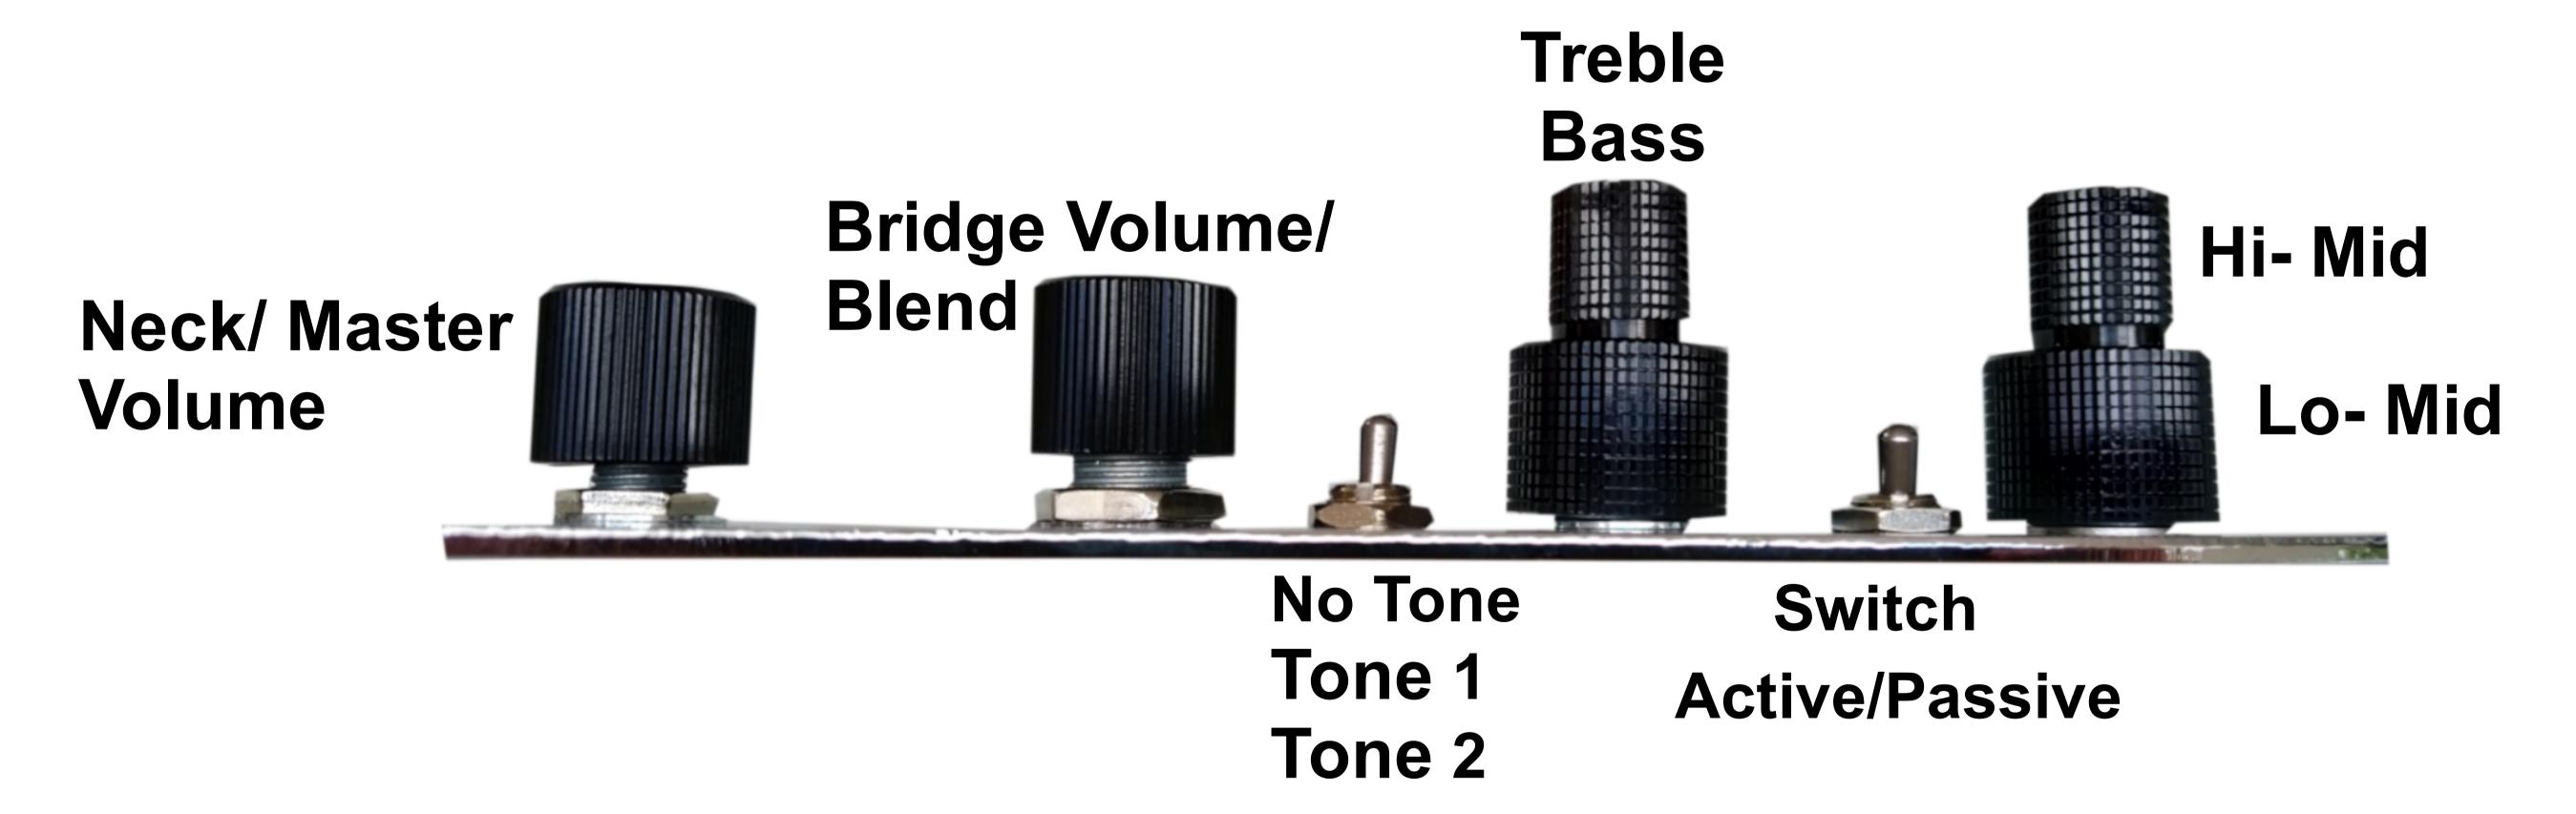

Red: + battery red wire

Black: - battery black wire

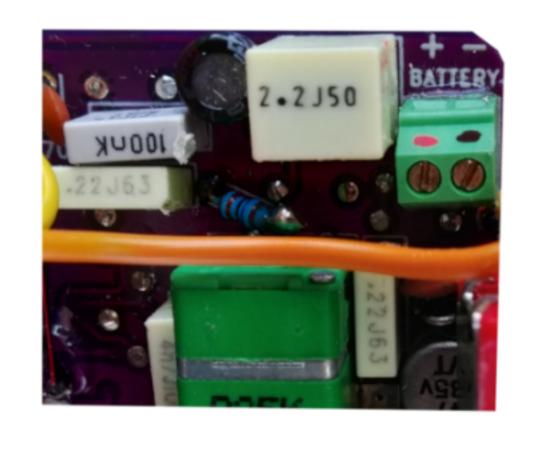


B= Hot from
Bridge pickup
GND for Bridge
pickup

N= Hot from Neck pickup GND for Neck pickup

Ognd B

N gnd

- 1- Extra Gnd connector
- 2- From Jack Ring (follow the colour)
- 3- From Jack Sleeve (follow the colour)
 - 4- From Jack Tip (follow the colour)

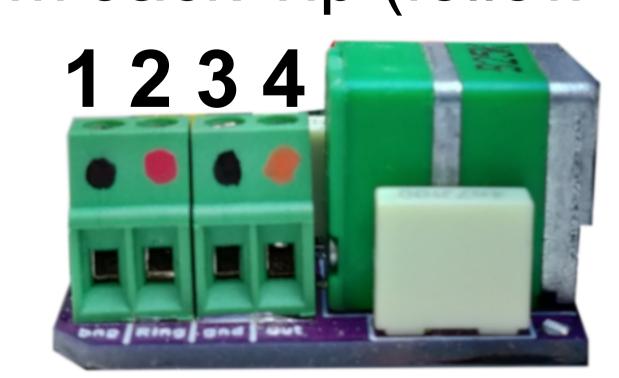

Warranty and Conditions: Any of our products, that are defective, will be replaced/ fixed and all expenses will be covered once it has been verified that the problem isn't a result of bad handling or negligence on the owners part. If the damage is due to negligence or wrong handling, warranty is lost and a cost can ocurr fior the devices repair (the shipping costs will not be covered on such cases). Warranty is valid for 2 years after the date of purchase.