



## Double NFP Jazzplate

The Double NFP Jazzplate is just an easy way for Jazzbass players to have the Double NFP filter sound on their instruments in an easy and quick way to install. It is solderless and it should fit on most Jazzbasses on the market. Unlike the single version, the output Jack needs to be mounted to the instruments body, so, modifications to the instrument might be needed.

The control plate keeps its traditional configuration of Neck Vol and Bridge Vol that are always in circuit. It has a Passive/Active switch and 2x Filters, one per pickup. Each Filter acts as a second order Lowpass filter with a resonant peak on its cutoff point (4khz) and the potentiometer allows you to sweep from anywhere between 150hz and its cutoff point of 4khz. This gives it its characteristic wah-wah sound, especially when boosting the cutoff point via the push-pull potentiometers.


**Installation and Warranty:** This is a solderless preamp. Any tampering with the preamp (example: soldering or unsoldering directly on the preamp or any of its components) can result on Warranty void.

**Suggestion:** Tie all your grounds into 1 or 2 wires and connect these to the GND connectors located next to the pickups inputs.

**Current Draw:** 4.5 mAh

**Voltage:** 9 to 18volts

**Battery fits perfectly on top of Volume potentiometers.**

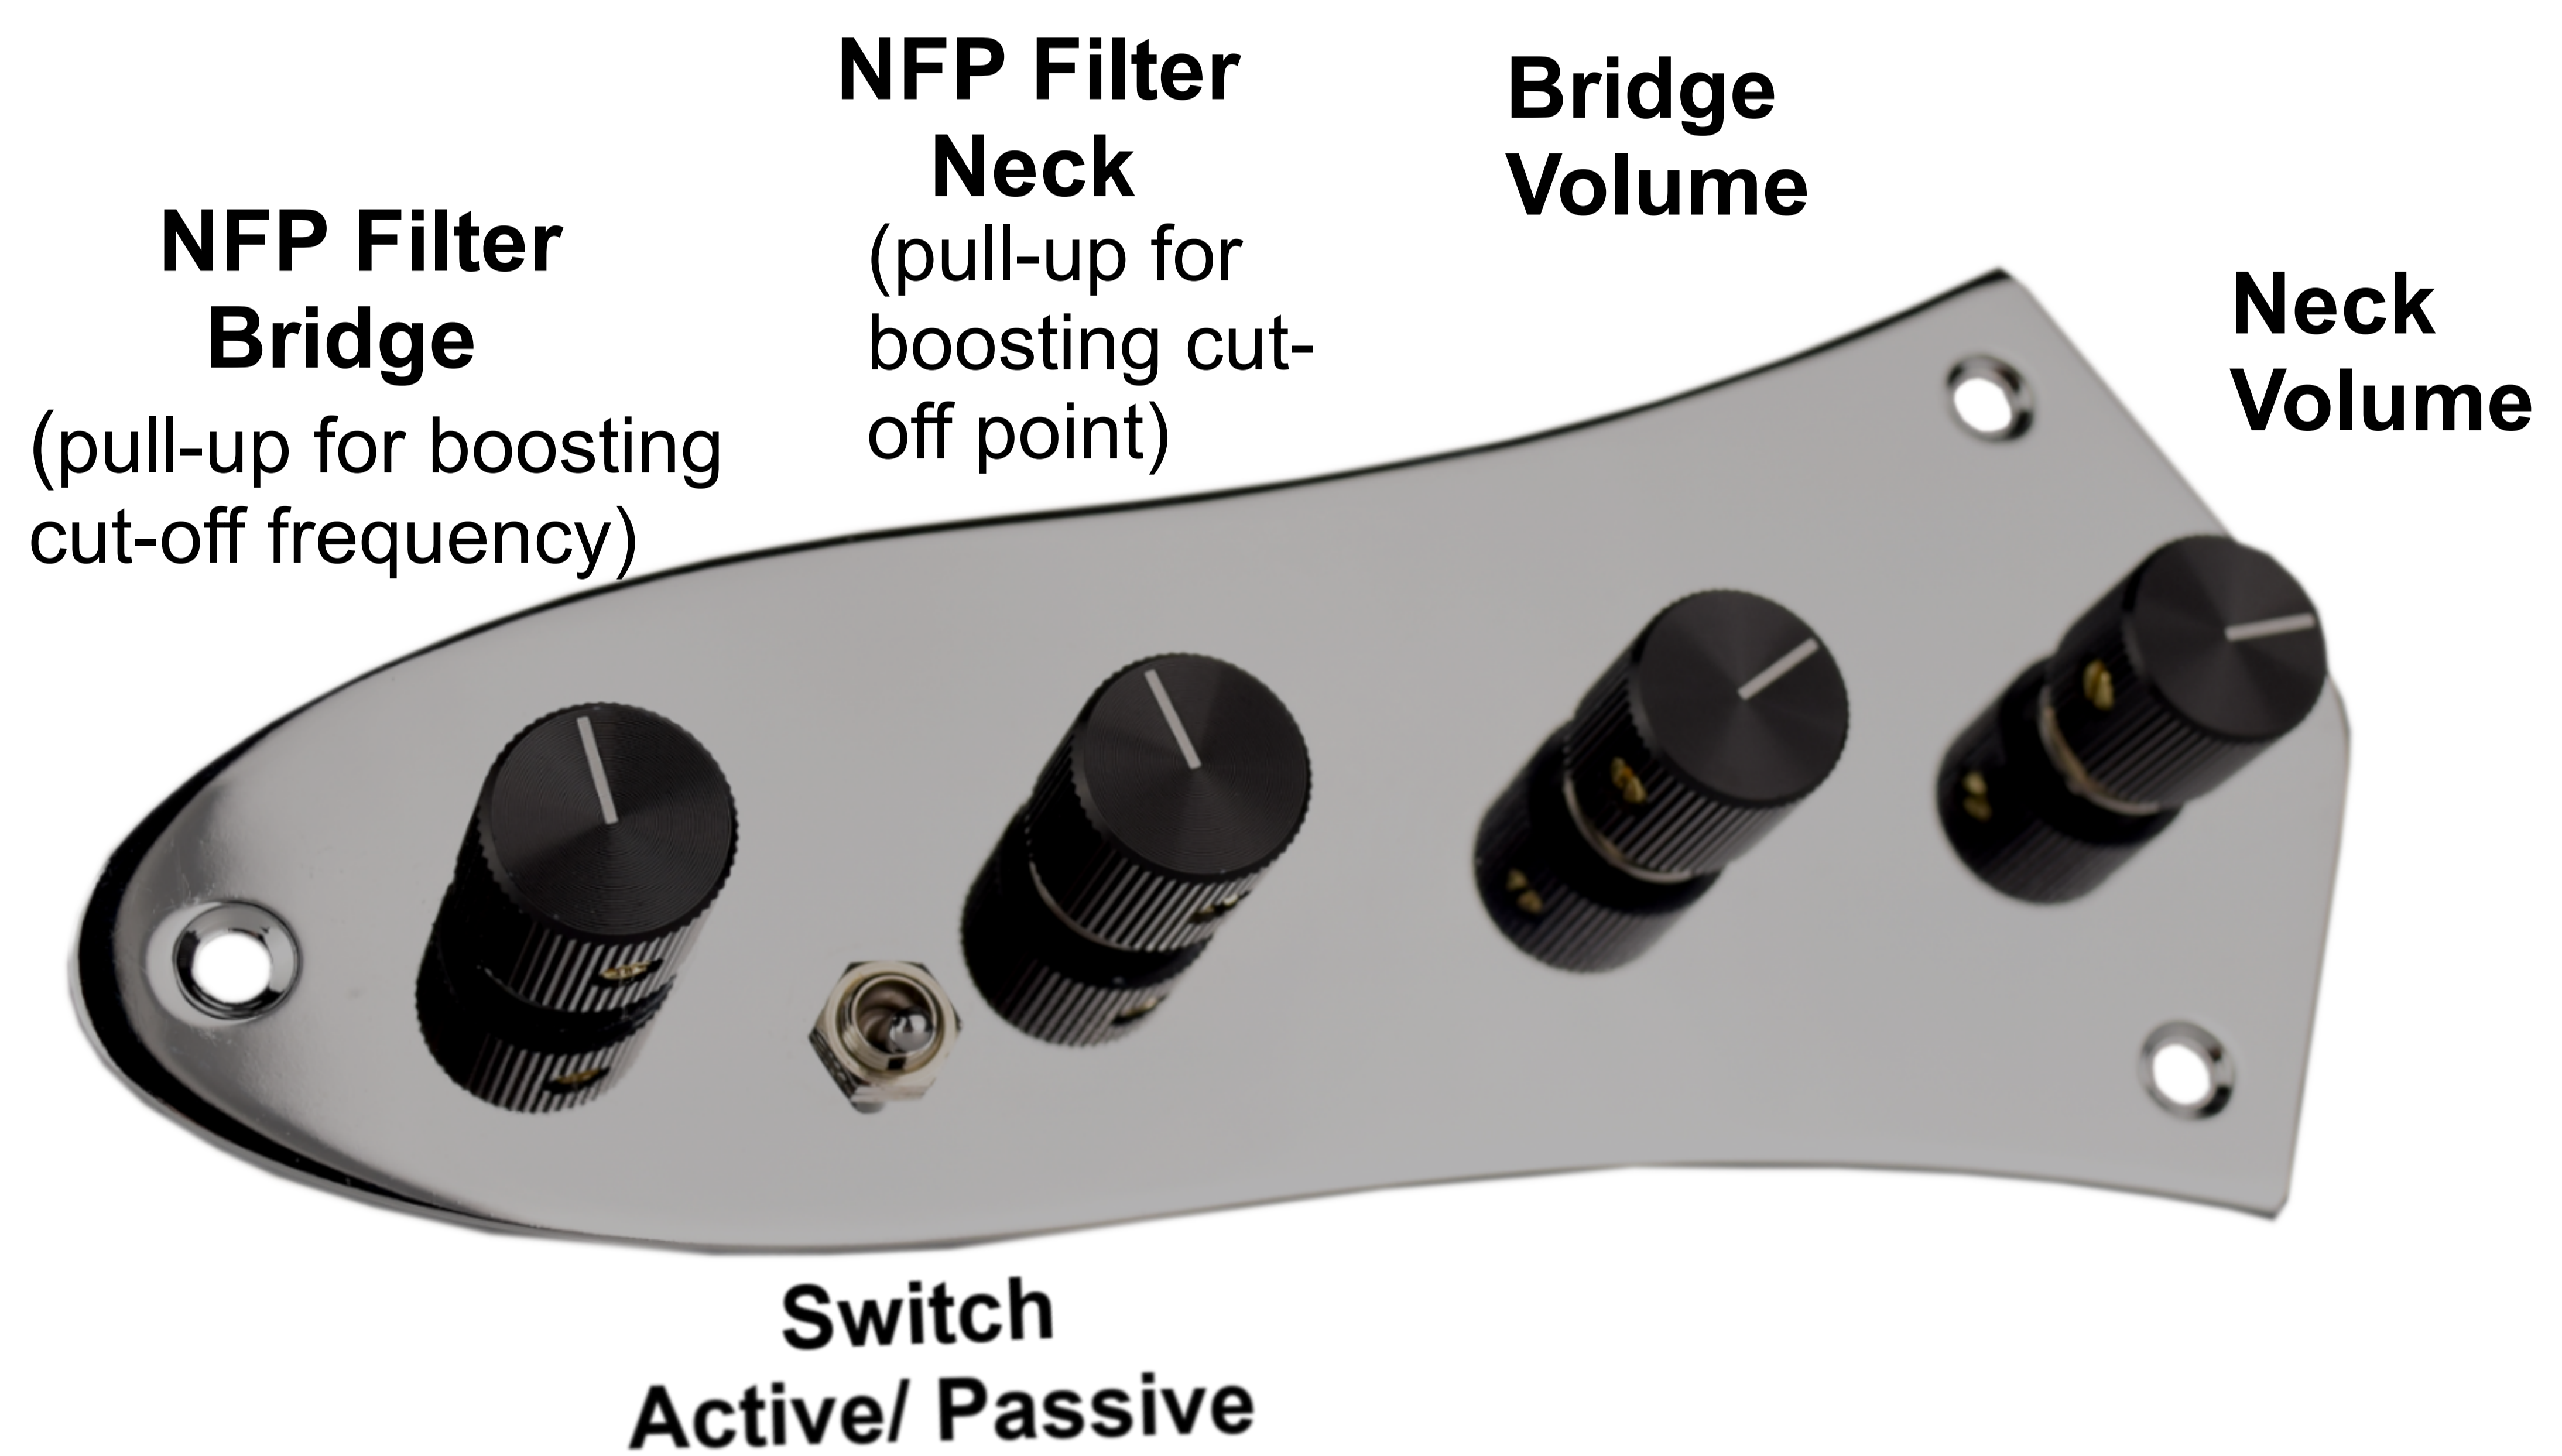


**GND x2=** Ground wires from pickups(usually black) connect to these two lugs.

Also, use these connectors to add the ground wires coming from under the bridge or, if you have shielding on the cavity, also connect the wire from the shielding together in one of these GND connectors.

**N=** Hot from Neck pickup


**B=** Hot from Bridge pickup

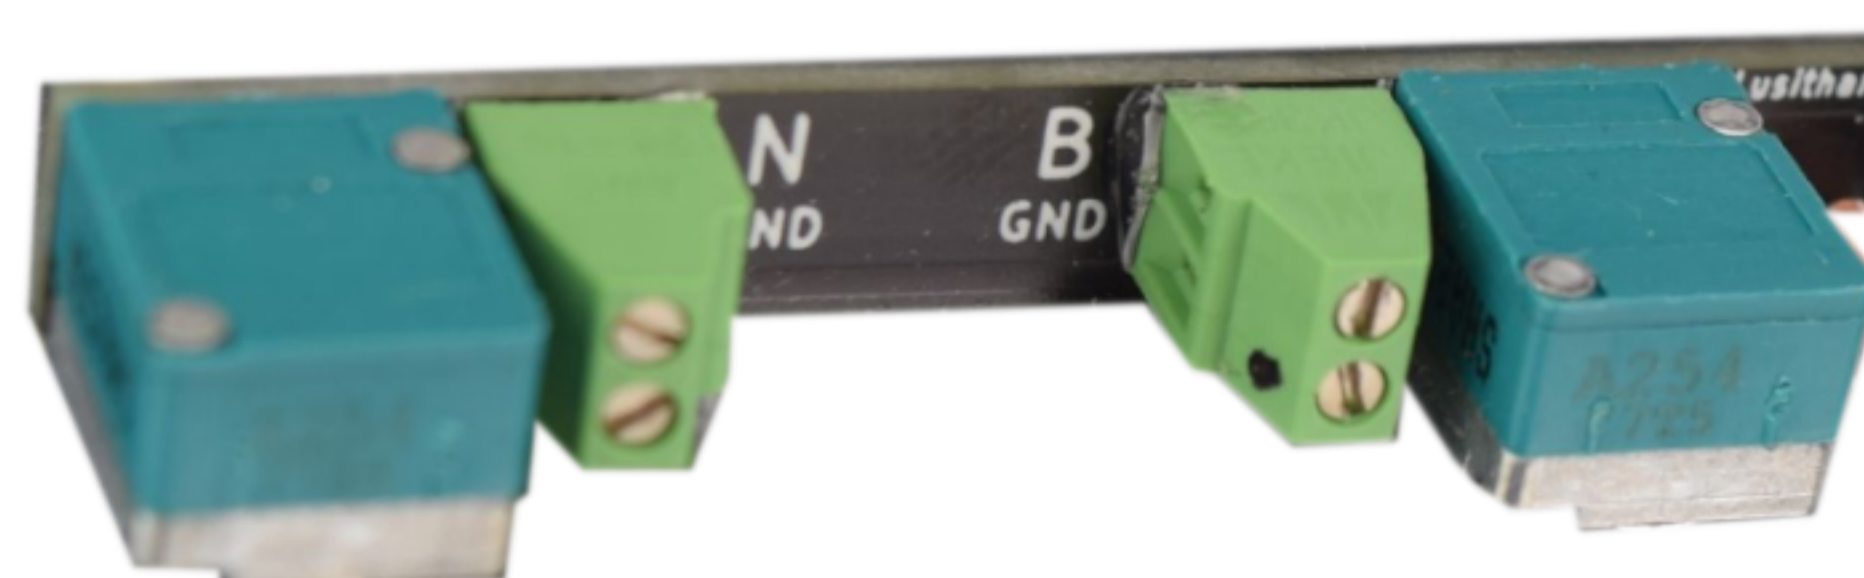

### Battery Connectors

**Red:** battery red wire  
**Black:** battery black wire

**Jack connector to board:**  
Follow the matching colours.

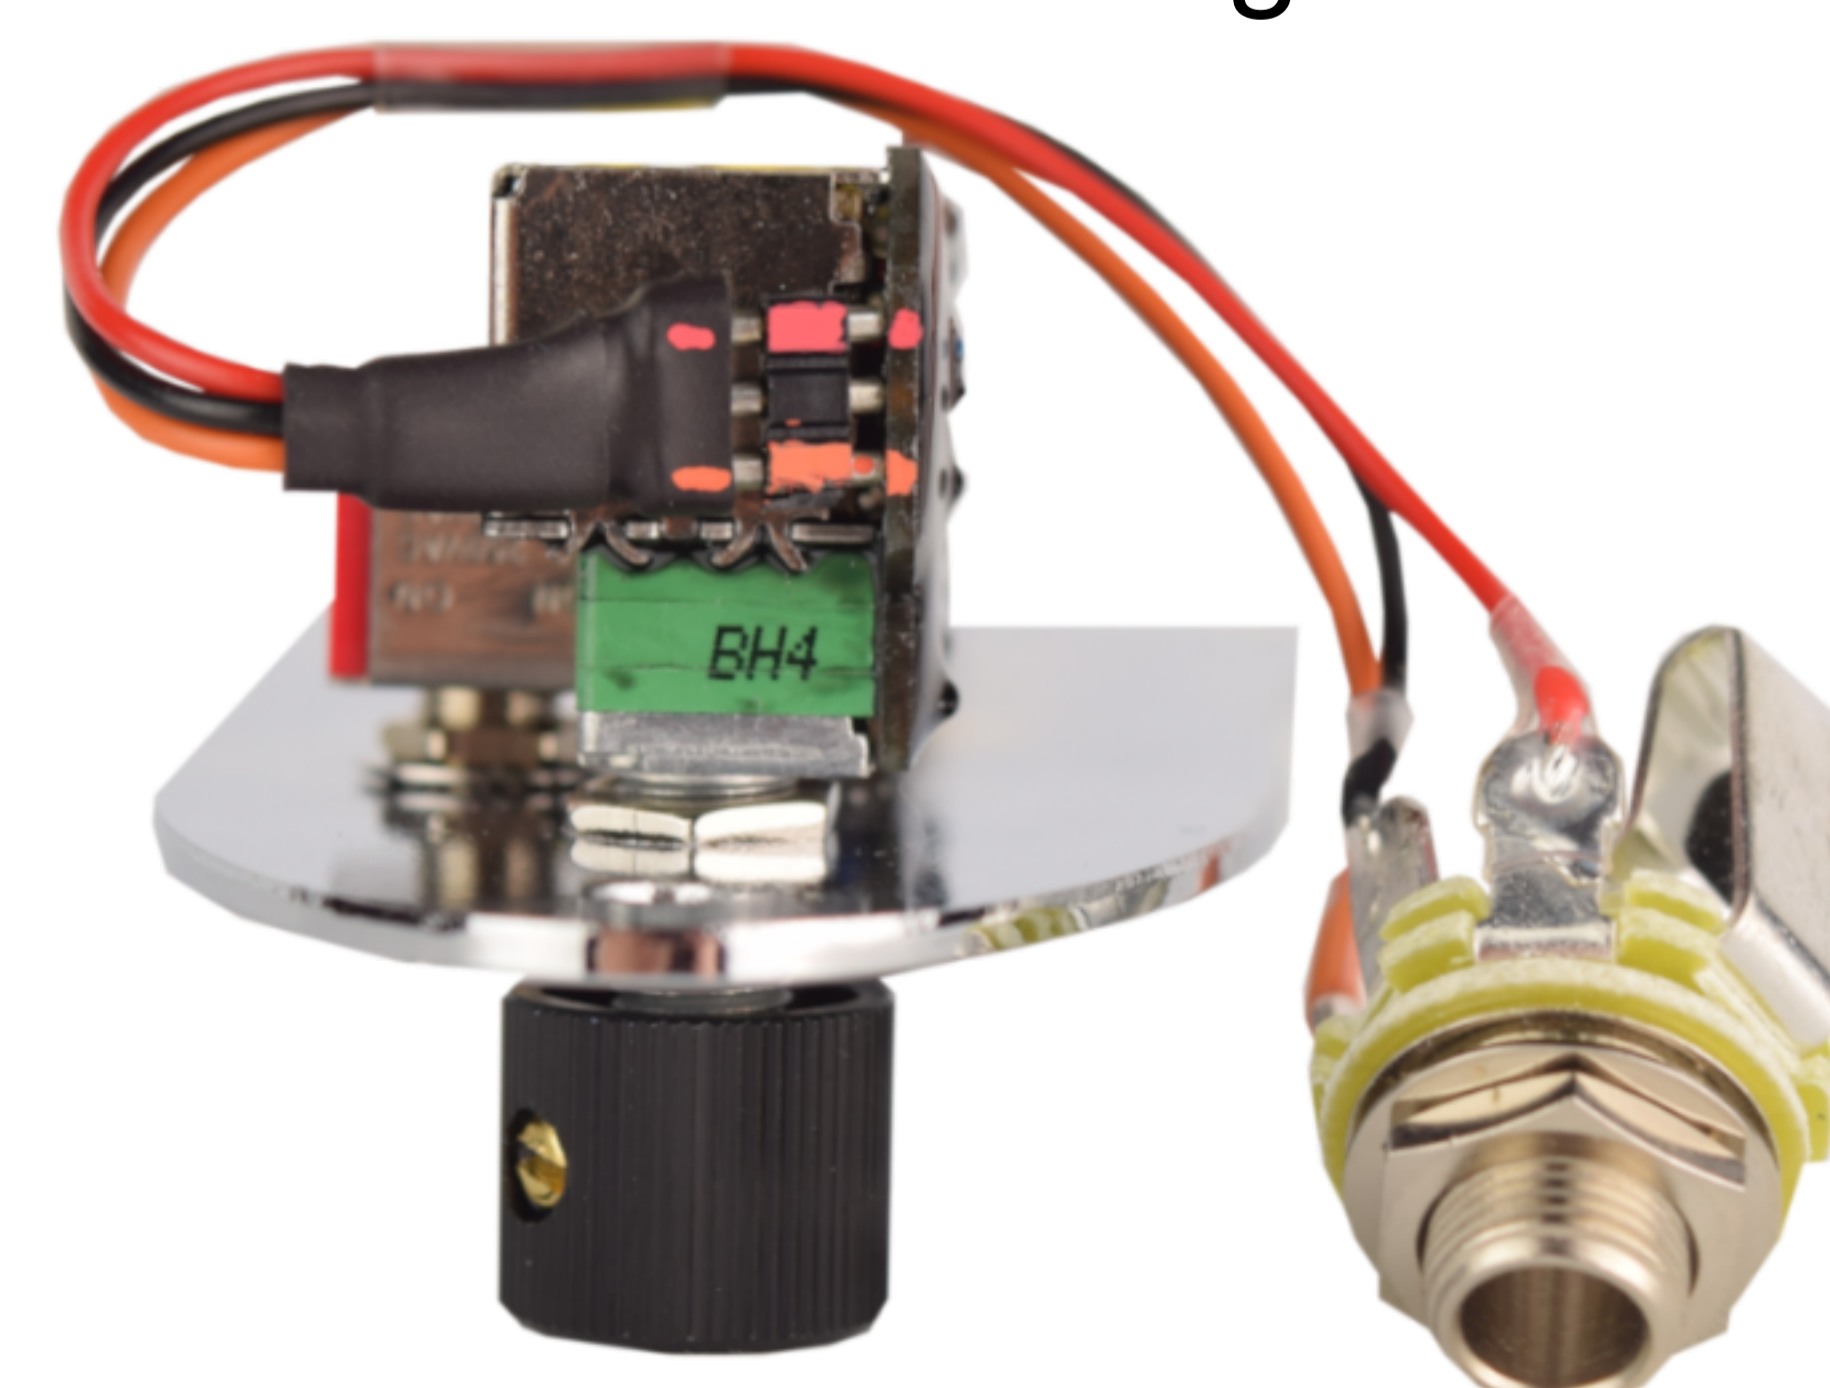

**Jack Output**

**Warranty and Conditions:** Any of our products, that are defective, will be replaced/ fixed and all expenses will be covered once it has been verified that the problem isn't a result of bad handling or negligence on the owners part. If the damage is due to negligence or wrong handling, warranty is lost and a cost can occur for the devices repair (the shipping costs will not be covered on such cases).

Warranty is valid for 2 years after the date of purchase.